



**BURG  
WÄCHTER**

ALWAYS THE  
SAFE CHOICE!



**Safes**



# Key Safe

## KEY SAFE

- secure storage for keys and other valuables
  - easy and controlled access for workmen, car rental, care personnel, tourists etc.
  - very strong zinc die-cast body
  - 4-digit, individually adjustable combination
  - 10.000 resettable combinations
  - '0-0-0-0' auto stop aids opening in poor light
  - for wall mounting indoors or protected outdoor areas
- **KEY SAFE 10 SB:**
    - integrated key hook
    - maximum key length 7cm
  - **KEY SAFE 20 SB:**
    - magnetic key ring holder
    - maximum key length 12cm



Key Safe 10 SB



Key Safe 20 SB

Art.-No.	EAN	W x H x D	Maximum key length
10 SB	37990 5	61 x 85 x 39	7
20 SB	38000 0	83 x 135 x 46	12

**NEW**



Key Safe 20 SB





P 3 E



P 3 E FS



P 4 E FS



P 1 S



P 2 S

## Freestanding home safes PointSafe P 1 - P 4

- tested in the BURG-WÄCHTER laboratory
- solid single-walled body
- double-walled door
- prepared for wall and floor fixing  
2 drill holes at half height on the back wall  
2 drill holes at half depth on the bottom,  
fixings included
- can be installed in cupboards, desks, etc.
- size P 1 and P 2: without shelf
- size P 3 and P 4: removable shelf
- size P 3 and P 4: for files of common size
- colour: black (similar to RAL 9004)



### Version E

Electronic combination lock with user programmed master, and user codes. User code can be changed at any time. Smooth motor powered locking mechanism automatically opens the door. No electrical supply necessary, 4 x Mignon LR6 AA batteries included. Also has mechanical emergency over-ride lock. The locking armature protrudes 13 mm.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
P 1 E	26760 8	180 x 280 x 200	173 x 273 x 141	135 x 188	7,5	6,7
P 2 E	24810 2	255 x 350 x 300	248 x 343 x 241	188 x 230	14,0	20,5
P 3 E	24820 1	320 x 442 x 350	310 x 435 x 288	240 x 317	20,0	38,8
P 4 E	24830 0	500 x 416 x 350	490 x 410 x 288	423 x 290	25,5	57,9



### Version E FS

Electronic combination lock with high quality fingerscan technology and user programmed master, and user codes. User code and fingerscans can be changed at any time. Smooth motor powered locking mechanism automatically opens the door. No electrical supply necessary, 4 x Mignon LR6 AA batteries included. Also has mechanical emergency over-ride lock. The locking armature protrudes 15mm.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
P 2 E FS	35390 5	255 x 350 x 300	248 x 343 x 241	188 x 230	14,0	20,5
P 3 E FS	35360 8	320 x 442 x 350	310 x 435 x 288	240 x 317	20,0	38,8
P 4 E FS	35380 6	500 x 416 x 350	490 x 410 x 288	423 x 290	25,5	57,9



### Version S

with safe lock and 2 keys, 100.000 key differs

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
P 1 S	24840 9	180 x 280 x 200	173 x 273 x 141	135 x 188	7,5	6,7
P 2 S	24850 8	255 x 350 x 300	248 x 343 x 241	188 x 230	14,0	20,5
P 3 S	24950 5	320 x 442 x 350	310 x 435 x 288	240 x 317	20,0	38,8

## Key blank for P 1-P 3 S

Key	EAN	
	40 03482...	
Key blank 17 B	16810 3	Key blank, PU 5 pcs.

**Enhanced protection against burglary and drilling!**  
Reinforced door leaf and locking bolts plates in front of the bolts as protection against drilling

### BURG-WÄCHTER Security-Level



# Laptop Safes - PointSafe



## Point-Safe 3 E Lap

- laptop safe with electronic lock
- solid single-walled body
- prepared for wall fixing, fixings included.
- can be installed in cupboards, desks, etc.
- with self-programmable electronic combination lock
- for files and laptops



### Version E

Electronic combination lock with user programmed master, and user codes. User code can be changed at any time. Smooth motor powered locking mechanism automatically opens the door. No electrical supply necessary, 4 x mignon LR6 AA batteries included. Also has mechanical emergency over-ride lock. The locking armature protrudes 13 mm.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
<b>P 3 E Lap</b>	18180 5	200 x 445 x 380	196 x 441 x 323	140 x 380	15,2	27,9



P 3 E Lap




### Version E FS

Electronic combination lock with high quality fingerscan technology and user programmed master, and user codes. Fingerscans and user code can be changed at any time. Smooth motor powered locking mechanism automatically opens the door. No electrical supply necessary, 4 x Mignon LR6 AA batteries included. Also has mechanical emergency over-ride lock. The locking armature protrudes 13 mm.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
<b>P 3 E FS Lap</b>	35370 7	200 x 445 x 380	196 x 441 x 323	140 x 380	15,2	27,9



P 3 E FS Lap

 Also available in hotel version!

**BURG  
WÄCHTER**

## Safety cabinets – Combi-Line



**FIRE RESISTANCE GRADE LFS 30 P**  
Certified protection against fire



**RESISTANCE GRADE S2**  
Certified protection against burglary



### CL 10 - CL 40 Safety cabinets 'Combi-Line'

#### SECURITY LEVEL S 2 FIRE RESISTANCE GRADE LFS 30 P

- BURG-WÄCHTER safety cabinets with a certification which is valid all over Europe. For the safe storage of documents, cash, jewellery, arms or ammunition, coins and valuables.
- security Level S 2 according to DIN EN 14450
- security Level B according to VDMA 24992, May 1995
- fire resistance LFS 30 P according to EN 15659 – 30 minutes fire protection for paper
- fire-protective material according to DIN 4102
- composite insulation in front of the door leaf provides heat protection for the lock and bolts
- tested and certified protection against burglary and fire

- double-walled construction
- internal hinge
- lateral locking through 25mm diameter strong round bolts plus sliding bolt on the top
- all-over gripping rail on the hinge side
- prepared for both wall and floor fixing, fixings included - extreme high breaking strength, 2 diagonally arranged drill holes on the back wall and 2 on the bottom
- colour: body grey, door light grey
- model S supplied with 2 keys
- standard series with 1 shelf each

LIGHT FIRE STORAGE UNIT	
Cert. mark No.	1 1 1 1 1 1
Protection level	LFS 30 P
Serial No.	1 1 1 1 1 1
Weight	5 5
Year of manufacture	2 0 1 8

SECURE SAFE CABINET	
Cert. mark No.	1 1 1 1 1 1
Security level	S2
Serial No.	1 1 1 1 1 1
Weight	5 5
Year of manufacture	2 0 1 8

### 3 security standards in one safe.

The safety cabinets Combi-Line correspond to 3 security standards:

- level B according to VDMA 24992, 5/95
- level S 2 according to DIN EN 14450
- fire resistance LFS 30 P according to EN 15659 - 30 minutes fire protection for paper

### Technical features.

Sliding bolt on the top with additional protection against attack.



# Security & Fire Safes - CombiLine



## Version E

Electronic combination lock 'SecuTronic', VdS tested, ECB-S certified according to EN 1300 class B, 1.000.000 different combinations possible, incl. 3 batteries, type Micro LR 03 AAA. The locking armature protrudes 7 mm.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
CL 10 E	33410 2	320 x 435 x 380	205 x 320 x 232	205 x 265	44	15
CL 20 E	33430 0	360 x 495 x 445	245 x 380 x 297	245 x 325	55	27
CL 40 E	33450 8	560 x 495 x 445	445 x 380 x 297	445 x 325	77	50



CL 20 E



## Version S

Security safe lock 'SecuSafe', VdS tested, ECB-S certified according to EN 1300 class A, 9 levers, more than 1.000.000 key differs.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
CL 10 S	33400 3	320 x 435 x 380	205 x 320 x 232	205 x 265	44	15
CL 20 S	33420 1	360 x 495 x 445	245 x 380 x 297	245 x 325	55	27
CL 40 S	33440 9	560 x 495 x 445	445 x 380 x 297	445 x 325	77	50



CL 10 S

### Key blank for CL 10-40 S

Key	EAN	
	40 03482...	
As per sample	16620 8	Length of key 80 mm
Key blank 55	33610 6	Key blank, PU 3 pcs.



CL 20 S

### Spare shelf

Art.-No.	Description
FB 52	Spare shelf for CL 10 including mounting clips
FB 53	Spare shelf for CL 20 - 40 including mounting clips

### Optimal utilisation of the interior space



CL 10

CL 20

CL 40

**BURG-WÄCHTER Security-Level**

LEVEL 0 10 20

LEVEL 0 10 20

LEVEL 0 5 10

LEVEL 0 7 10

LEVEL 0 8 10

**BURG  
WÄCHTER**

## Domestic Freestanding safes – Karat



Stainless steel body  
Flame cutting protection



RESISTANCE GRADE 0  
Certified protection against burglary



Currently the only certified  
safe lock with  
fingerscan module



Version E:  
optionally available with  
fingerscan module



### MT 24 N - MT 26 N domestic freestanding safes 'Karat'

#### RESISTANCE GRADE 0

- type tested and supervised security by ECB-S
- protected against burglary and fire
- triple walled body with exterior walls of flame-cutting protected stainless steel material
- double-walled door with additional armoured, door leaf thickness 7 mm SM steel
- additional lock plating for extra protection
- three-sided locking through strong square bolts, bolts on the top and on the bottom with integrated steel rolls - extreme protection against flame-cutting, drilling and attack
- all-over gripping bar on the hinge side
- prepared for both wall and floor fixing, fixings included – extreme high breaking strength. 1 centrally arranged drill hole on the back wall and 1 on the bottom.
- fire-protective material in body and door according to DIN 4102-A1
- convenient depth for common sized files, 1 adjustable shelf
- colour: platinum grey (similar to RAL 9007)

#### security advantage:

- special protection against drilling
- thermal emergency locking mechanism in front of each bolt



#### SecuTronic – the first biometric safe lock with VdS certification.

- developed by BURG-WÄCHTER
- VdS approved safe lock with fingerscan module, EN 1300 class 2
- programmable electronic lock
- in addition to the 10 x 6-digit pincodes, you can program up to 20 fingerprints
- when opening with fingerscan, 2 different fingers have to be programmed/entered
- 1.000.000 combinations possible



- the scanner only works with 'real, live, fingers'; fake fingers or copies will not be identified
- this precise and highly sensitive procedure of authentication operates with different dermal conditions, from extremely dry to more humid skin
- the opening of a safe by using the fingerscan is very quick and comfortable



Currently the only certified  
safe lock with fingerscan  
module

#### SecuSafe – the resettable high security safe lock

- class B according to EN 1300
- 10 levers
- 50.000.000 key differs
- in case of loss a new key can be programmed straight away
- Multiple safes can be instantly re-programmed by the user to be keyed alike. This is ideal for customers who want more than one safe to work with the same key.
- can be supplied with additional keys at the time of purchase



# Commercial Safes - Karat



## Version E

Electronic combination lock 'SecuTronic', ECB-S certified according to EN 1300 class B, with intelligent menu-driven operation, administration of up to 10 users, 1.000.000 different combinations and up to 300 optional TSE E-KEY possible. User names, access times and rights, calendar functions, can be programmed via optional TSE PC software. Incl. 2 batteries Mignon LR 6 AA. The locking armature protrudes 16 mm.

Art.-No.	EAN	Exterior H x W x D mm	Interior H x W x D mm	Door H x W Opening mm	Weight kg	Volume l
MT 24 N E	19150 7	340 x 430 x 390	250 x 348 x 294	250 x 336	43	25,8
MT 26 N E	19020 3	530 x 430 x 390	440 x 348 x 294	440 x 336	60	45,3



MT 24 N E



## Version E FS

Electronic combination lock 'SecuTronic' with integrated fingerscan module, VdS approved. With intelligent menu-driven operation, administration of up to 10 user codes, up to 20 fingerscans and up to 300 optional TSE E-KEY. User names, access times and rights, calendar functions, can be programmed via optional TSE PC software. Incl. 2 batteries Mignon LR 6 AA. The locking armature protrudes 30 mm.

Art.-No.	EAN	Exterior H x W x D mm	Interior H x W x D mm	Door H x W Opening mm	Weight kg	Volume l
MT 24 N E FS	32280 2	340 x 430 x 390	250 x 348 x 294	250 x 336	43	25,8
MT 26 N E FS	32290 1	530 x 430 x 390	440 x 348 x 294	440 x 336	60	45,3



MT 26 N E FS



## Version S

Resettable, armoured high-security safe lock 'SecuSafe', ECB-S certified according to EN 1300 class B, with 2 keys, 10 levers, key retaining, 50.000.000 key differs. More security in case of losing the key – immediately resettable to a new key. The locking armature protrudes 3 mm.

For detailed information regarding the resettable high security safe lock TRS 22 see p. 130.


Art.-No.	EAN	Exterior H x W x D mm	Interior H x W x D mm	Door H x W Opening mm	Weight kg	Volume l
MT 24 N S	16050 3	340 x 430 x 390	250 x 348 x 294	250 x 336	43	25,8
MT 26 N S	19090 6	530 x 430 x 390	440 x 348 x 294	440 x 336	60	45,3




MT 24 N S

## Spare keys and additional keys for MT 24-26 N S and C 1-4 S

Key sets	EAN	
	40 03482...	
Set 55-80-2	08890 6	Key set 55-80-2: two key set, length: 80 mm
Set 55-80-4	08910 1	Key set 55-80-4: four key set, length: 80 mm
Set 55-80-6	06880 9	Key set 55-80-6: six key set, length: 80 mm

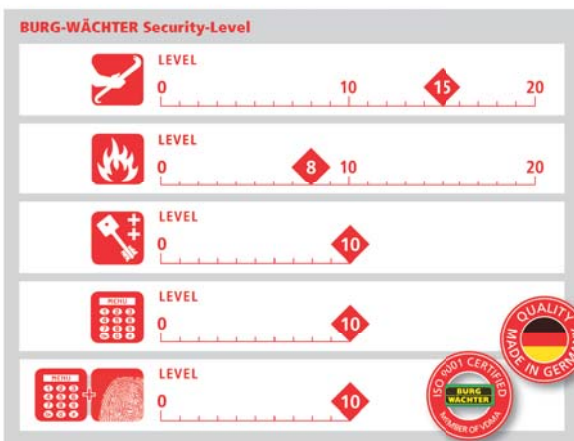

## Optimal utilisation of the interior space



MT 26 N S





# Commercial Freestanding Safes – Diplomat

- FIRE RESISTANCE GRADE LFS 60 P  
Certified protection against fire
- RESISTANCE GRADE I  
Certified protection against burglary
- VdS TEST: 0  
Currently the only certified safe lock with fingerscan module



Version E:  
with fingerscan module



NEW  
INNOVATION

## MTD 34 F60 - MTD 38 F60 commercial freestanding safes 'Diplomat' RESISTANCE GRADE I, FIRE RESISTANCE GRADE LFS 60 P



- type tested and supervised security by ECB-S/VdS
- certified protection against burglary and fire
- 3 walled body with armoured, special fireproof insulation
- BURG-WÄCHTER special insulation in body and door – FPC buildup (Fire Protection Concrete)
- special rear wall construction with additional armoring – advantage: low overall depth due to slim overall design
- optimal use of internal space due to slim body and door – 4-walled door
- extensive armoring in front of bolt work and locking bolt
- 4-sided locking through strong round bolts
- specially concealed hinges
- prepared for wall and floor anchoring, includes fixings

- **Security advantage:** double emergency locking system, not resettable
- convenient depth for common sized files
- adjustable shelf
- metallic silver colour as standard, special paint on request
- recessed door
- intumescent seal, swells and seals the door in event of fire



### SecuTronic – the first biometric safe lock with VdS certification.

- developed by BURG-WÄCHTER
- VdS approved safe lock with fingerscan module, EN 1300 class 2
- programmable electronic lock
- in addition to the 10 x 6-digit pincodes, you can program up to 20 fingerprints
- when opening with fingerscan, 2 different fingers have to be programmed/entered
- 1.000.000 combinations possible



- the scanner only works with 'real, live, fingers'; fake fingers or copies will not be identified
- this precise and highly sensitive procedure of authentication operates with different dermal conditions, from extremely dry to more humid skin
- the opening of a safe by using the fingerscan is very quick and comfortable

VdS TESTED  
Currently the only certified safe lock with fingerscan module

# Commerical Fire & Security Safes - Diplomat



## Version E

Electronic combination lock 'SecuTronic' with integrated fingerscan module, VdS approved, class 2. With intelligent menu-driven operation, administration of up to 10 user codes, up to 20 fingerscans and up to 300 optional TSE E-KEY. User names, access times and rights, calendar functions, etc. programmed via optional TSE PC software packages. Incl. 2 batteries Mignon LR 6 AA. The locking armature protrudes 27 mm.



Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
<b>MTD 34 F60 E</b>	37510 5	380 x 500 x 462	255 x 372 x 300	255 x 337	112	28,3
<b>MTD 35 F60 E</b>	37530 3	470 x 500 x 462	345 x 372 x 300	345 x 337	130	38,5
<b>MTD 36 F60 E</b>	37550 1	625 x 500 x 462	500 x 372 x 300	500 x 337	161	55,8
<b>MTD 38 F60 E</b>	37570 9	985 x 500 x 462	860 x 372 x 300	860 x 337	233	96,0




MTD 35 F60 E

## Accessories


Art.-No.	EAN
	40 03482...
<b>IT MTD</b>	37960 8 interior safe for MTD F60 (H 180 x W 372 x D 260 mm)

NOTE: Keyed Versions are available upon request (sizing is the same.)

## Optimal utilisation of the interior space

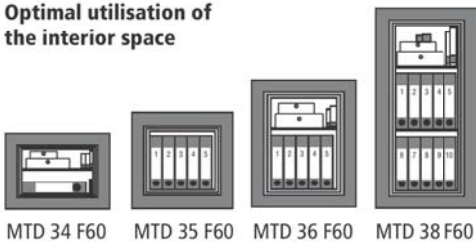

MTD 34 F60 MTD 35 F60 MTD 36 F60 MTD 38 F60

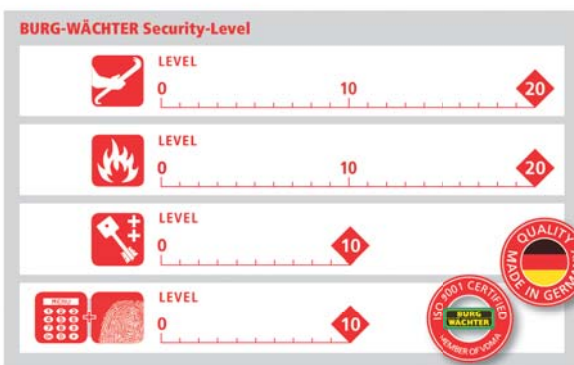

MTD 36 F60 E



MTD 38 F60 E



**Freestanding home safe HomeSafe H 3 with slot**

- with slot 230 x 8 mm
- ideal for fast and safe storage of banknotes or envelopes
- light weight of 16 kg, makes this safe ideal for mobile use, for example, at events etc.
- colour: black
- technical features as per H 3 safes above

- **version S:**  
Security safe lock - VdS tested;  
ECB-S certified according to EN 1300 class A, 9 levers, more than 1.000.000 key differs
- **version E:**  
Electronic combination lock 'SecuTronic', VdS tested;  
ECB-S certified according to EN 1300 class B.  
1.000.000 different settings possible.  
Incl. 3 batteries (Micro LR 03 AAA).  
The locking armature protrudes 9 mm.



Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
<b>H 3 S C4 EWS</b>	26090 6	257 x 347 x 298	216 x 340 x 243	184 x 276	16,0	17,8
<b>H 3 E C4 EWS</b>	26190 3	257 x 347 x 298	216 x 340 x 243	184 x 276	16,0	17,8



H 3 E C4 EWS

**BURG-WÄCHTER Security-Level**

# Gun Safes



## Ranger A 5

### SECURITY LEVEL A

#### Single-walled gun cabinet for 5 rifles

- security level A according to VDMA 24992, 5/95
- double-walled door, Thickness of door 55mm
- body of 3 mm steel with specially designed fire fold
- three-sided locking through strong round bolts
- clear height: 1250 mm
- the hinges protrude 20 mm
- holder for cleaning rod on the door
- prepared for wall and floor fixing
- with lockable interior safe (H 143, W 293, D 232mm interior)
- high-quality workmanship
- German Technology
- conforms to § 36 of the current German law on arms (April 2009)
- colour: black (similar to RAL 9004)



Ranger A 5



#### Version S

Armoured security double bit key lock 'SecuSafe' - VdS tested; ECB-S certified according to EN 1300 class A, 9 levers, 1 million key differs. The hinges protrude 20 mm.

Art.-No.	EAN	for rifles	Exterior H x W x D	Interior H x W x D	Weight
	40 03482...		mm	mm	
A 5 S	02970 1	5	1450 x 300 x 335	1444 x 294 x 265	64



#### Version E

Electronic combination lock 'SecuTronic', VdS tested; ECB-S certified according to EN 1300 class B. 1.000.000 different combinations possible. Incl. 3 batteries Micro LR 03 AAA. The locking armature protrudes 13 mm. The hinges protrude 20 mm.

Art.-No.	EAN	for rifles	Exterior H x W x D	Interior H x W x D	Weight
	40 03482...		mm	mm	
A 5 E	34250 3	5	1450 x 300 x 335	1444 x 294 x 265	64



## Ranger W 7 A/B

### SECURITY LEVEL A / Interior compartment SECURITY LEVEL B

#### Single-walled gun cabinet for 7 rifles

- security level A according to VDMA 24992, 5/95
- double-walled door, thickness of door 55mm
- body of 3 mm steel with specially designed fire fold
- three-sided locking through strong round bolts
- clear height: 1220 mm
- the hinges protrude 20 mm
- holder for cleaning rod on the door
- prepared for wall and floor fixing
- lockable interior compartment, double-walled (H 110, W 274, D 165 mm interior)
- security grade B according to the VDMA 24992 - 5/95
- high-quality workmanship - protection against small fire
- German Technology
- conforms to § 36 of the current German law on arms (April 2009)
- colour: black (similar to RAL 9004)



Ranger W 7 A/B



#### Version S

Armoured security double-bit lock 'SecuSafe' - VdS tested; ECB-S certified according to EN 1300 class A, 9 levers, 1 million key differs. The hinges protrude 20 mm.

Art.-No.	EAN	for rifles	Exterior H x W x D	Interior H x W x D	Weight
	40 03482...		mm	mm	
W 7 A/B S	29980 7	7	1450 x 400 x 335	1444 x 394 x 265	76



#### Version E

Electronic combination lock 'SecuTronic', VdS tested; ECB-S certified according to EN 1300 class B. 1.000.000 different combinations possible. Incl. 3 batteries Micro LR 03 AAA. The locking armature protrudes 13 mm. The hinges protrude 20 mm.

Art.-No.	EAN	for rifles	Exterior H x W x D	Interior H x W x D	Weight
	40 03482...		mm	mm	
W 7 A/B E	34260 2	7	1450 x 400 x 335	1444 x 394 x 265	76

### Key blank for Ranger A 5, W 7 A/B

Key	EAN
	40 03482...
Key blank 51	16670 3

Key blank, PU 3 pcs.



# Commercial Fire & Security Safes - Office Doku



OfficeDoku 124 E



OfficeDoku 124 S

## Office Doku 121 - 124

### FIRE GRADE S 60 P AND RESISTANCE GRADE II

- document safe, protection against burglary and fire
- 2 security grades in one, type tested and supervised burglary protection by ECB-S
- body double-walled, compound-filled with fire protecting material
- door double-walled
- solid three-sided locking through round bolts of 28 mm Ø, additional round dog bolts on hinge side
- prepared for floor fixing with fixing material, 1 centrally arranged drill hole on the bottom



- fire protection: S 60 P (RAL-RG 626/7) (1 hour fire test for paper)
- body with specially designed fire fold
- depth for files of common size, 2 adjustable shelves, also available with interior safe
- standard series version painted light grey RAL 7035, armature black



#### More security:

- non-resettable double emergency re-locking mechanism within the door mechanics



#### Version E

Electronic combination lock 'SecuTronic', with integrated fingerscan module, VdS approved class 2. With intelligent menu-driven operation, administration of up to 10 user codes, up to 20 fingerscans and up to 300 optional TSE E-KEY. User names, access times and -rights, calendar functions, etc. programmed via optional TSE software packages. Incl. 2 batteries Mignon LR 6 AA. The locking armature protrudes 50 mm.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
OfficeDoku 121 E	30720 5	626 x 641 x 555	476 x 498 x 336	476 x 498	300	79,6
OfficeDoku 124 E	30760 1	1096 x 641 x 555	946 x 498 x 336	946 x 498	450	158,3

## Interior safe for Office Doku 121 + 124

It is also possible to assemble various interior safes (interior depth 290 mm) one below the other.

Art.-No.	EAN	suitable for:	H x W x D
	40 03482...		mm
IT - Office 1	15230 0	Office Doku 121 + 124	151 x 498 x 303



#### Version S

Resettable, armoured high-security safe lock, 'SecuSafe', ECB-S certified according to EN 1300 class B, with 2 keys, 10 levers, key retaining, 50.000.000 key differs. The locking armature protrudes 25 mm. More security in case of losing the key – immediately resettable to a new key.

For detailed information on the resettable high security safe lock SecuSafe see p. 130.

Art.-No.	EAN	Exterior H x W x D	Interior H x W x D	Door H x W	Weight	Volume
	40 03482...	mm	mm	Opening mm	kg	l
OfficeDoku 121 S	30730 4	626 x 641 x 555	476 x 498 x 336	476 x 498	300	79,6
OfficeDoku 124 S	30770 0	1096 x 641 x 555	946 x 498 x 336	946 x 498	450	158,3

## Key sets for OL 121+124 Doku

Detailed information regarding the resettable high security safe lock 'SecuSafe' see p. 130.

Key Set	EAN	
	40 03482...	
Set 55 GLK-2	09270 5	two key set, length 162 mm with hinge
Set 55 GLK-4	09290 3	4 key set, length 162 mm with hinge
Set 55 GLK-6	06900 4	4 key set, length 162 mm with hinge

The BURG-WÄCHTER safes of this series comply to the specifications of the European norm EN 1143-1 and/or EN 1047-1. This is approved by the ECB-S certificates of the European Certification Board • Security systems (Certification authorities according to EN 45001). The ECB-S certification includes multiple unannounced inspections of the production sites. Hereby a constant quality level is guaranteed. Errors and omissions excepted.



## Office Doku 121 E - 124 E are all equipped with fingerprint scanner module



# Merchandising



83974

## Bike-Palette

Bicycle Security Display Merchandiser

Art.-No.	Exterior W x D
	mm
83974	600 x 800

## Promotions-Palette

Promotional Display Merchandiser

Art.-No.	Exterior W x D
	mm
37380	600 x 800



37380



89350



89041



89031









89021

## Safe Stands











Art.-No.	Description	Exterior H x W x D
		mm
89350	PointSafe Stand	1850 x 500 x 700
89041	Combi-Line Safe Stand	1850 x 500 x 700
89031	Karat Safe Stand	1850 x 500 x 700
89021	Diplomat Safe Stand	1850 x 500 x 700

## Safe-locks

Level	Version	Certification	Special features	Installed in series
 	S	none	6 levers	PointSafe P 1-P 3 S
 	S SecuSafe	VdS-tested, ECB-S-certified EN 1300 class A	9 levers, 1 million key differs	H 3 S CL 10 - CL 40 S Ranger A 5 S & W 7 A/B S
 	S SecuSafe	VdS-tested, ECB-S-certified EN 1300 class B	10 levers, resetable, key retaining, 50.000.000 key differs	MTD 34 - 38 F60 S, MT 24-26 N S Office-Doku 121-124 S

Multiple safes can be instantly re-programmed by the user to be keyed alike. This is ideal for customers who want more than one safe to work with the same key. The innovative technology ensures that these locks have an extremely high tamper resistance, resistance to violent attacks and a maximum service life.

## Electronic combination locks

Level	Version	Certification	Special features	Installed in series
 	E	none	Electronic combination lock with user programmed master- and usercode, Key override for emergency opening.	Pointsafe P 1-4 E Point P 3 E Lap
 	E SecuTronic	VdS-tested, ECB-S-certified EN 1300 class B	1.000.000 different combinations possible, one 6-digit code	H 3 E, CL 10-40 E Ranger A 5 E & W 7 A/B E
 	E SecuTronic	VdS-tested, ECB-S-certified EN 1300 class B	1.000.000 different combinations possible, up to 10 usercodes programmable, max. 300 optional TSE E-Keys	Karat MT 24-26 N E
 	E FS	none	Electronic combination lock with fingerscan and user-programmed master- and usercode, additional lock for emergency opening	Pointsafe P 2-4 E FS Point P 3 E FS Lap
 	E FS	VdS-tested, ECB-S-certified EN 1300 class B	1.000.000 different combinations possible, up to 10 usercodes, up to 20 fingerscans and max. 300 optional TSE E-Keys	MTD 34 - 38 F60 E MT 24-26 N E FS Office-Doku 121-124 E

# Overview of Certifications & Security Levels



The VdS tests and certifies products around the topic of security. The BURG-WÄCHTER safe locks SecuSafe and SecuTronic achieve high resistance values in the audited lock classes. The accurate performance and classification of the locks can be found on the opposite side (left). The VdS label stands for quality and reliability.



Many BURG-WÄCHTER-safes meet the requirements of European Standards EN-1143-1 and/or EN 1047-1. This is confirmed in the ECB•S certification of the European Certification Board • Security Systems (certification body according to EN 45011) The ECB • S certification includes a multi-annual unannounced inspection of the production sites. Thus a consistent level of quality is guaranteed. All details are without guarantee.



Insurance coverage of the various security levels see next page 160 →



Safes with this symbol meet the technical requirements of the standard sheet 24992, May 1995. BURG-WÄCHTER is a member of the Association „FV security systems“ within the VDMA, Frankfurt.



This label says: Thoroughly tested in the BURG-WÄCHTER laboratory. To ensure reliable quality even for inexpensive safes.



These safes are characterised by a particularly high level of fire protection.



## BURG-WÄCHTER classifications

BURG-WÄCHTER safes correspond to the highest level of technology and are recognised internationally.

BURG-WÄCHTER is a member of the Association „Security Systems“ VDMA and the European Security Systems Association (ESSA).

Technical changes may lead to dimension and design modifications.



BURG-WÄCHTER safes correspond to the highest state-of-the-art technology and are internationally recognized. BURG-WÄCHTER is member of the VDMA security systems association and European Security Systems Association (ESSA e. V.). Changes in dimensions and constructions of wall safes and freestanding home safes can occur due to technical production changes.